

Visualizing motion in potential wells

Pratibha Jolly

Department of Physics, University of Delhi, Delhi, India 110007

Dean Zollman, N. Sanjay Rebello, and Albena Dimitrova

Department of Physics, Kansas State University, Manhattan, Kansas 66506

(Received 6 January 1997; accepted 12 June 1997)

The concept of potential-energy diagrams is of fundamental importance in the study of quantum physics. Yet, students are rarely exposed to this powerful alternative description in introductory classes and thus have difficulty comprehending its significance when they encounter it in beginning-level quantum courses. We describe a learning unit that incorporates a sequence of computer-interfaced experiments using dynamics or air-track systems. This unit is designed to make the learning of potential-energy diagrams less abstract. Students begin by constructing the harmonic or square-well potential diagrams using either the velocity data and assuming conservation of energy or the force-displacement graph for the elastic interaction of an object constrained by springs or bouncing off springy blocks. Then, they investigate the motion of a rider magnet interacting with a configuration of field magnets and plot directly the potential-energy diagrams using a magnetic field sensor. The ease of measurement allows exploring the motion in a large variety of potential shapes in a short duration class. © 1998 American Association of Physics Teachers.

I. INTRODUCTION

The concept of potential-energy diagrams is of fundamental importance to teaching of physics. In many situations, instead of Newton's law, energy considerations are used as the basis for analyzing the behavior of an object interacting with a given system. The procedure is to consider how the potential energy of the object varies as a function of distance. Given this information and the total energy of the object, all other details of behavior can be deduced. This method is adopted in quantum physics for studying the motion of microscopic particles. Students in beginning-level mechanics courses, however, are rarely exposed to this powerful alternative description of motion. Thus they frequently have difficulty comprehending the significance and power of potential-energy functions when they first encounter them in introductory quantum mechanics.

We have attempted to remedy this situation by creating a set of experiments and a teaching unit designed to provide beginning-level students with an early exposure to the idea of potential-energy diagrams. Familiar mechanical systems are used to create potential shapes akin to those encountered in models of atomic and nuclear interactions. Observing and interpreting motion in these potential wells, on the one hand, and establishing the relationship between the operative forces and the potential energy on the other, provides a straightforward understanding of an otherwise abstract concept.

A survey of literature shows that very few earlier attempts have set up experiments to study motion in potential wells.¹⁻³ The most comprehensive effort using this approach is in the work of Saraf *et al.*⁴ The essential idea in all these laboratory investigations is to place magnets along an air track to create a variety of potential barriers and wells. The previous developers used a photointerrupt and timing device to measure directly the velocity of a glider at a number of locations along its path. Then assuming conservation of energy, their students determined the potential energy as a function of distance. Sometimes for the sake of economy a single sensor was employed. Then, the experiment had to be

repeated a large number of times with the sensor placed at different locations. This procedure made the experiment rather tedious, and variations in initial conditions usually led to a relatively large scatter in the data.

Prior to commercial proliferation of computer-based laboratory equipment, designing an experiment that could yield the velocities at different locations along the path in a single run was not trivial. Thus all such earlier work employed dedicated transducers and computer programs not commonly available off the shelf. For instance, Eckstein^{3,5} used a specially designed motion detector which is essentially a Mylar strip crossed by regularly marked black stripes. As the object was in motion, the number of stripes passing through two high resolution photocells was counted as a function of time. The students ported these data into a spreadsheet to compute the velocities. The procedural problems inherent in these methods make the experiments rather complicated in practice and difficult to execute in a typical undergraduate class.

While magnetic interactions generate very interesting shapes for the potential function, the force field of an arbitrary configuration of magnets can be rather complicated and the motion, difficult to predict. For this reason, we recommend introducing the notion of potential well using the more familiar elastic interactions at the outset. In our approach, students first construct potential wells for a simple physical system such as a cart oscillating along a track constrained by springs or moving freely along a track and bouncing off springy blocks placed at the ends of the track. Once the students have built sufficient competence in identifying the forces and interpreting the corresponding potential-energy diagrams in these cases, they explore the motion in more complicated potential shapes generated by configurations of magnets.

We have designed our experiments using transducers and data acquisition systems readily available from commercial suppliers. However, the setups and the measurement procedures incorporate several novel features. In the following sections, we provide details of experiment design and outline the learning paths envisaged.

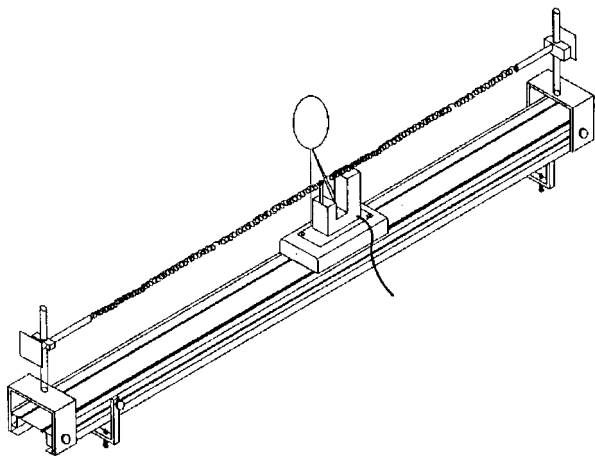


Fig. 1. The experimental arrangement for investigating potential-energy diagrams using dynamics cart and springs.

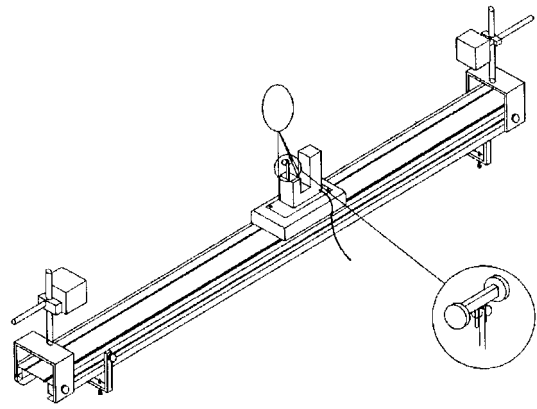


Fig. 3. A dynamics cart is a deep square well potential.

II. EXPERIMENTS

A. Elastic interactions

We have used the data acquisition system ULI, the program MOTION, the Student Force Sensor and the Motion Detector, all available from Vernier Software,⁶ to record the motion and the force in real time. The experiments use either the dynamics cart or the air-track system from PASCO scientific.⁷ The advantage of using the dynamics cart is that the setup is relatively inexpensive, involves few adjustments, and is more robust for classroom usage, while the advantage of using the air track is that friction is smaller; consequently, the crucial assumption of conservation of energy holds better and the motion can be observed over a longer duration of time.

1. Spring oscillator

Figure 1 gives a schematic diagram of the basic setup with a cart held to the two ends of the track by a set of matched springs. The Student Force Sensor is mounted on the cart using a flat plate with a small post on which the sensor can be screwed. This plate also mounts another post on which a disk is fixed at a suitable height to reflect the signal from the ultrasonic motion detector. Our investigations show that a circular disk works quite well for the purpose. The springs attach on one end to the hooks welded by the manufacturer

to the cantilever beam of the force sensor and on the other to specially designed adjustable clamps fixed at the two ends of the track. The end clamps allow for easy alignment of the springs. Care is also taken to eliminate any wobble of the force sensor or the reflector to ensure low-noise data for the position and the force.

When an air-track system is employed, because of the added weight, the glider cannot float easily if the commercially available students' force sensor is mounted on it. An excellent and relatively inexpensive alternative is to use the strain gauge force sensor kit⁸ available from Vernier and fabricate a much lighter force sensor. This kit contains a set of strain gauge transducers, the circuit diagram, and the electrical components for constructing an off-balance bridge for measuring the analog signal. We glued the transducers symmetrically on opposite faces of the free end of a narrow spring iron cantilever beam having an approximate width of 1 cm and length of 10 cm. The other end of the beam was clamped in a metal piece that could be plugged into a socket that exists on the top plate of the glider. A U-shaped piece was welded to the free end of this beam. Two small holes were drilled on this piece to hook the springs. The reflecting disk was mounted on the glider using a simple clamp arrangement that could be fitted to the base of the glider. The end posts for attaching the springs were made from an acrylic wedge machined to snap on to the air track. It is

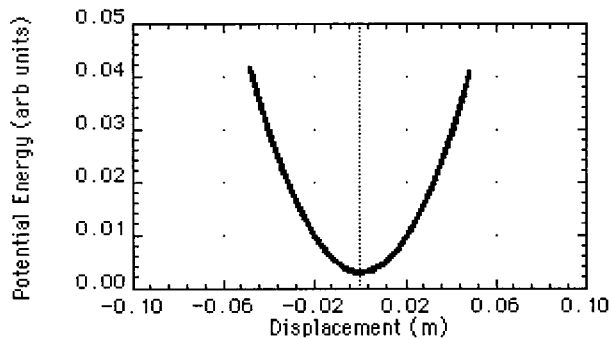


Fig. 2. Harmonic potential well for a spring oscillator on an air track. The solid line shows the potential-energy function obtained from distance measurements of an oscillator on an air track.

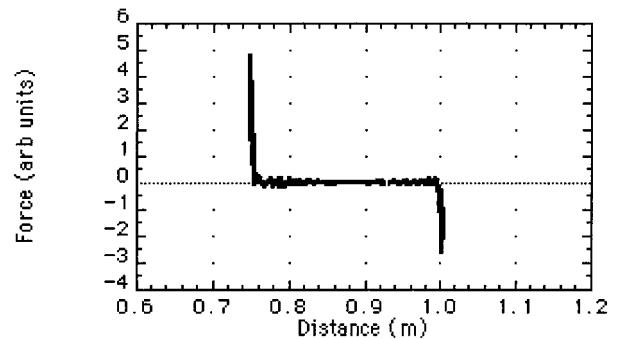


Fig. 4. Force-distance graph for a cart bouncing off springy blocks at the ends of the track.

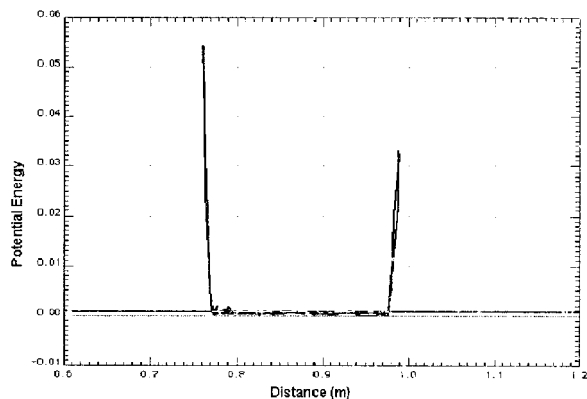


Fig. 5. Square well potential diagram for the cart bouncing off springy blocks at the ends of the track.

important to check that the addition of this hardware does not place the glider off balance or block the flow of air.

An important advantage of fabricating this force sensor has been that the leads of the electrical circuit could be made from extremely light and flexible connecting wire. We suspended this wire from a tall clamp to keep it from rubbing against the surface of the laboratory table. This arrangement overcomes the problems posed by the thick short cable that leads the signal from the manufacturer assembled student force sensor to the computer interface. This cable rubbing against the table introduces much of the friction in the dynamic cart.

Harmonic potential well: The data acquisition software records the distance of the cart from the position of the motion detector. A simple transformation using the data manipulation facilities of the software converts this measurement to a displacement about the equilibrium position of the cart. The program also automatically computes the velocities from the raw position data. The students view the displacement-time and force-time graphs and correlate these results with the on-line plots of force-displacement and velocity-displacement curves.

These data are then used to construct the potential energy diagram by using one of several options.

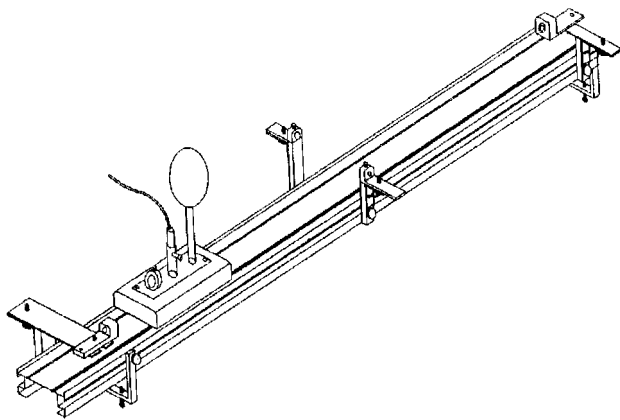


Fig. 6. Mechanical setup for recording the interaction of a rider magnet on a dynamic cart moving through a configuration of field magnets arranged along a track.

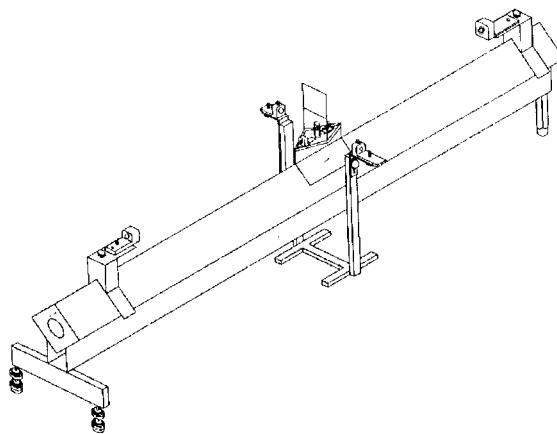


Fig. 7. Mechanical setup for recording the interaction of a rider magnet on a glider moving through a configuration of field magnets arranged along an air track.

- (1) Assuming conservation of energy, the program can be used to compute the kinetic energy as the derived quantity $KE = \frac{1}{2}mv^2$ and the potential energy as $PE = TE - KE$.
- (2) The students can fit a linear least-squares line to the force-displacement graph, relate the slope of the line to the effective spring constant k , and then compute the potential energy as $PE = \frac{1}{2}kx^2$.
- (3) The potential energy can be found by superposing a grid on the force-displacement graph and estimating the area under the curve.

Figure 2 displays the potential-energy function obtained from distance measurements of an oscillator on an air track. The best quadratic fit is superposed as the solid line; the spread in the potential-energy values indicates the extent of the inevitable energy losses and the limits of validity of the assumption of conservation of energy.

2. Bouncing off springy walls

An important quantum mechanical system is a free particle bound in an energy well. A simple analog model of this situation is provided by a cart rolling freely along the track and bouncing off spring blocks placed at the edges (Fig. 3).

The basic arrangement is the same as for the case of the spring oscillator except that the springs are disconnected and spring blocks are fixed to the end posts with Velcro.TM We have variously used a sponge with a thin cardboard square glued to its faces, a blackboard eraser, and other soft materials of varying coefficients of restitution. For the dynamics cart, a double-faced, hammer-like plastic plunger (inset, Fig. 3) was designed to fit into the hooks of the student force sensor to generate a neat signal on impact with the end blocks on either side.

Square-well potential: Figure 4 displays the force versus distance graph for the bouncing at the edges of the track. The students interpret these graphs qualitatively, relating the sudden changes in velocity to the force experienced at the walls of the well. The corresponding potential-energy diagram, obtained by smoothing the velocity data to eliminate noise, is given in Fig. 5. By comparing this graph with the harmonic well curve and considering the difference in the motion of

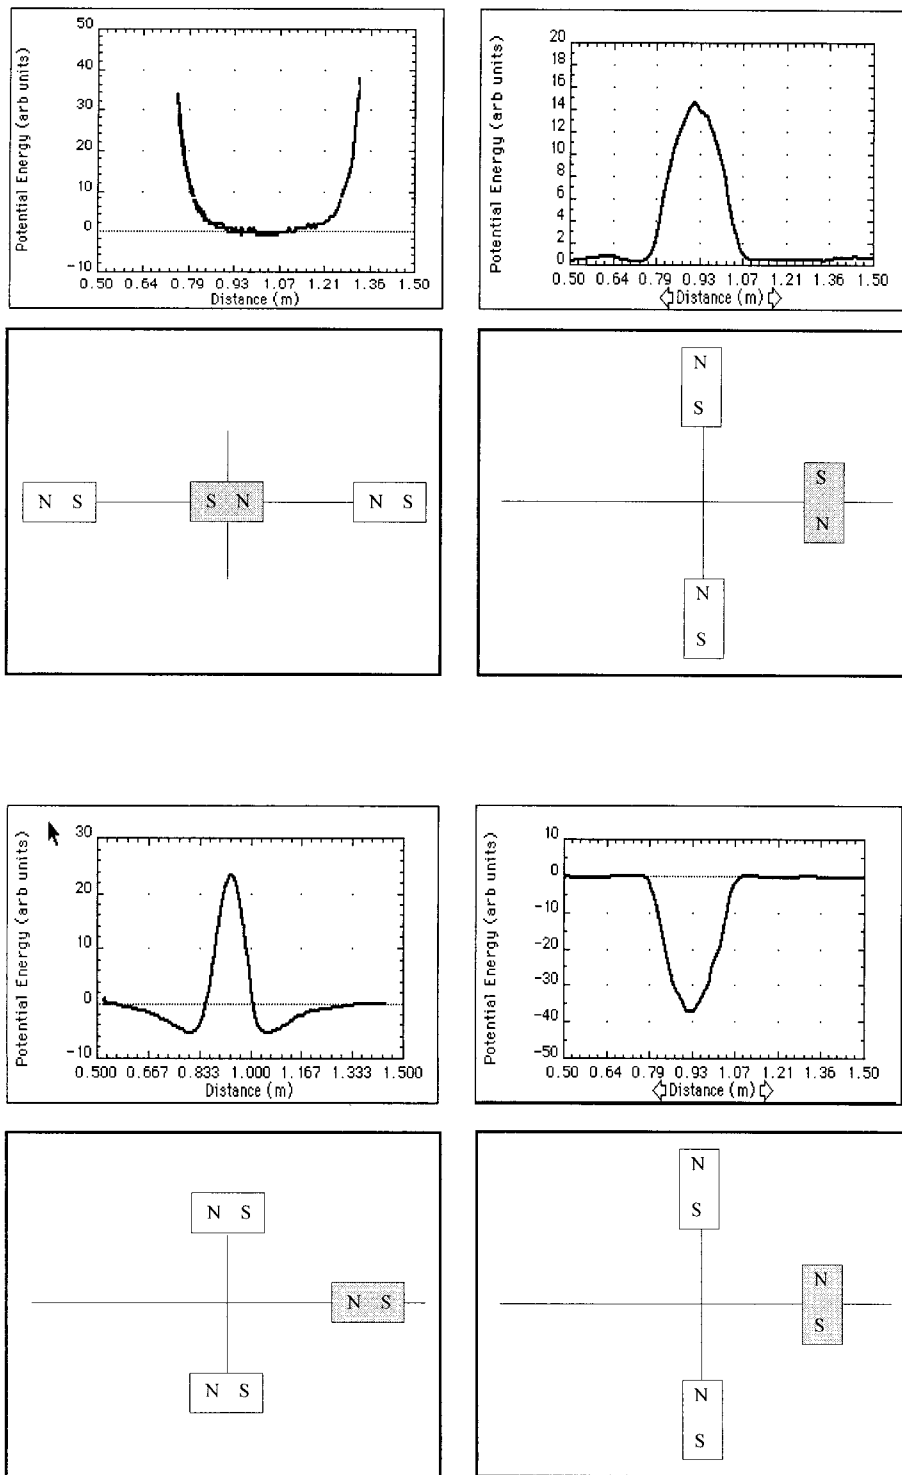


Fig. 8. Potential-energy diagrams. Direct measurement using a magnetic field sensor as a rider magnet (gray) moves on a track interacting with a configuration of field magnets.

the object in the two cases, the students gain an understanding of how the shape of the potential well is indicative of the operative forces.

B. Magnetic interactions

Some important potential shapes can be generated by the combined effect of magnets placed in attractive and repul-

sive modes along the track and interacting with an object moving along the track carrying a magnet. The interaction at a distance has an important advantage over the contact interactions, which often have too much damping to allow the assumption of energy conservation even over a short duration.

In principle, the measurement of position using the motion detector in real time allows a straightforward method of

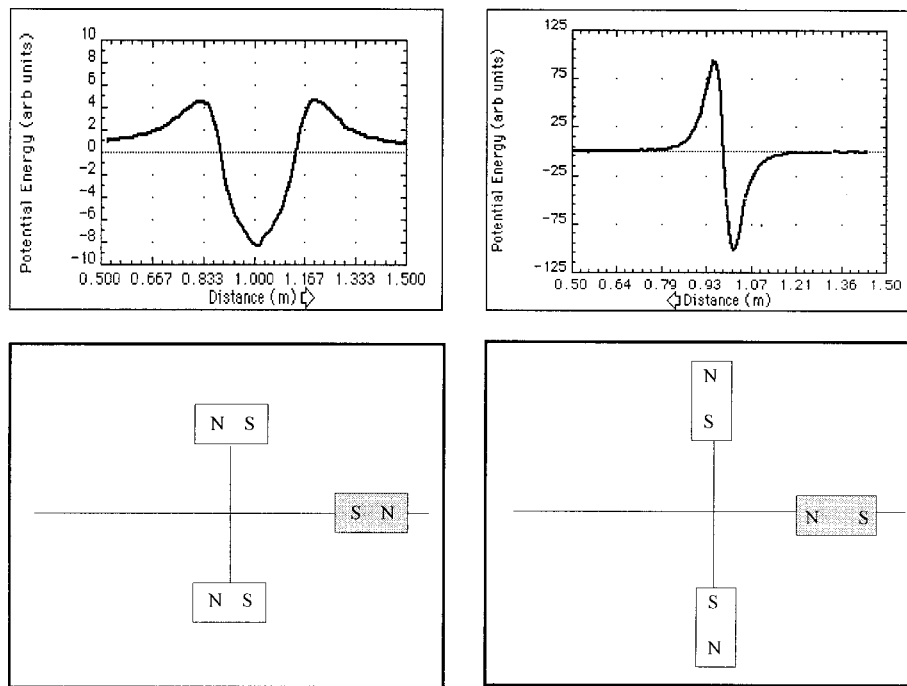


Fig. 8 (Continued.)

computing the velocity and hence the kinetic and potential-energy functions for a nearly conservative system. In practice, even the slightest noise in the signal can lead to large jitters in the values of velocity and render this procedure useless. In a bid to circumvent this problem, we have used a magnetic field sensor,⁹ which incorporates a Hall effect transducer, to generate directly the potential-energy diagrams for one-dimensional motion. This sensor is mounted on the cart or the glider, and as it moves through a configuration of magnets, the magnetic intensity is recorded as a function of distance. Since for a magnetic dipole placed in an external magnetic field of intensity B_x along the x direction, the net force experienced along the x direction is given by

$$F_x = -q_m l \frac{\partial B_x}{\partial x},$$

where $q_m l$ is the strength of the dipole, the potential energy

$$U(x) = - \int_0^x F_x dx = q_m l B_x$$

is simply proportional to the magnetic field intensity B_x . Thus the measurement gives a direct on-line plot of the potential energy as a function of distance. The method offers a great deal of experimental simplification and permits an investigation of several potential shapes in a short duration class.

Dynamics cart system: Figure 6 gives a schematic diagram of the mechanical arrangement. We have used Neodymium magnets supplied by PASCO.¹⁰ These magnets have a large magnetic moment and need to be used with due care. The magnets are held along or across the track at a fixed height using specially designed mounting platforms that slide into the edges of the track. The field magnet can slide along a slot in the platform and can be fixed with any orientation in a horizontal plane parallel to that of the track. These degrees of

freedom allow, (i) changing the strength of the magnetic interaction by varying the distance of the field magnet from the edge of the track, and (ii) changing the nature of interaction by rotating the axis of the magnet relative to that of the rider magnet. The clamping screws prevent the magnets from flying out under the influence of strong interactions. A flat plate screwed on the cart has a holder slot for sliding in the Hall probe tube casing. The rider magnet is fixed on this plate with Velcro™. Again, the plate carries a post for attaching the reflector disk.

Air-track system: The basic arrangement using the air track remains unchanged from the one for the dynamics cart. In this case, too, we have fabricated and used specially designed accessory pieces to hold the magnets along and across the track (Fig. 7). The Hall probe is mounted on the glider using a simple holder that plugs into the central hole on the top plate of the glider. To decrease added mass, we reduced the length of the acrylic tube holding the sensor to about 5 cm and also replaced the thick output cable by thin flexible wires.

A good way of eliminating wobbling and unnecessary torque is to use symmetrical planar arrangements of magnets around the axis of motion, ensuring that the additional mass of the glider does not cause the center of mass to shift from the axis of the track.

C. Potential-well diagrams

The actual measurement of the magnetic intensity using the Hall probe is quite simple. Figure 8 displays a few illustrative configurations of the rider and field magnets and the corresponding potential-energy diagrams generated through actual experiments. In these graphs, we have defined the potential energy in regions far from the positions of the magnets as zero and accordingly used the corresponding constant Hall probe reading to offset the measured values.

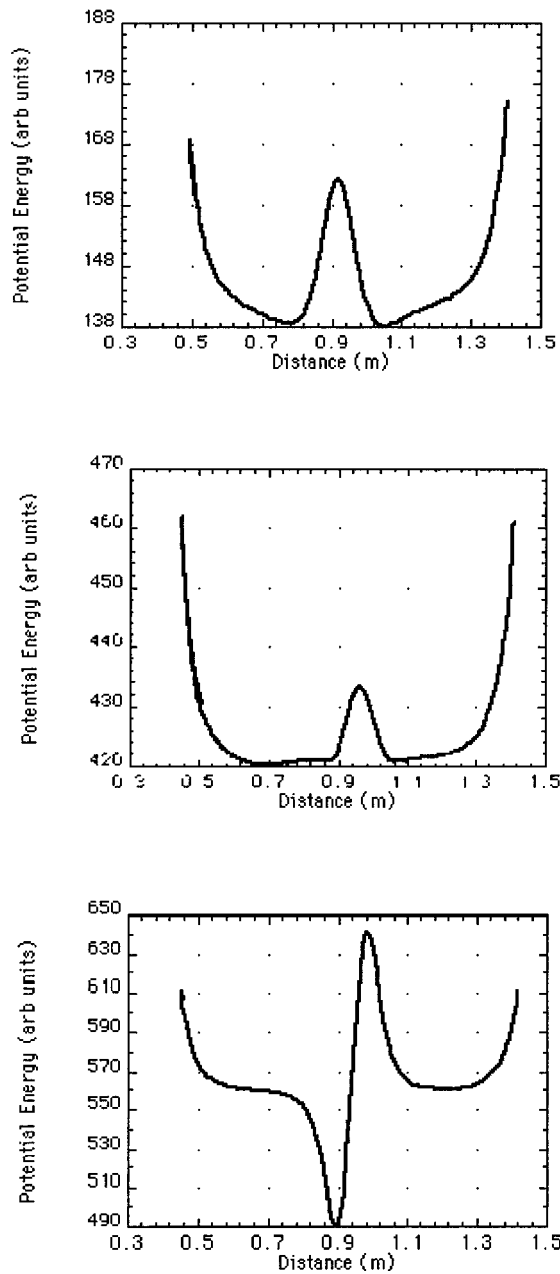


Fig. 9. Students are asked to create magnet arrangements to create potentials such as these wells.

For each of these potentials, students obtain an interesting result by starting the cart moving with different velocities. Then, they see variations in the change in motion, regions where the cart is able to travel, and the regions where it gets trapped and executes local oscillations. The students may also slide the cart gently across the region of interaction and retrace the potential-energy curve. Relating the speed that must be imparted to the cart to cross a particular barrier or potential shape gives a kinesthetic experience of how an object moves in a potential well.

III. THE LEARNING PATH

These experiments have been incorporated into the laboratory activities accompanying a conceptual course for future elementary school teachers^{11,12} and a modern physics course

Table I. Student response to the questionnaire seeking their assessment of the potential-energy diagram activity.

		Scale				
		1	2	3	4	5
		Not effective			Effective	
Q	Question					
1	Collecting data with the computer	1	6	10	14	16
2	Setting up the experiments	2	2	10	22	10
3	Looking at potential-energy versus distance graphs	1	7	11	20	8
4	Comparing the motion and potential-energy diagrams	2	3	13	18	9
5	Performing graphing and descriptions in writing	1	7	9	23	6
6	Answering the questions on the worksheet	1	1	14	27	4
7	Discussions with the group members	1	0	3	16	25
8	The potential-energy activity in general	3	1	12	21	8
		Difficult			Easy	
9	Difficulty level of using the hardware/software	1	10	11	19	5

for future secondary teachers at Kansas State University. We developed an activity sheet to guide students along the desired learning path. During the early stages of the lesson the emphasis is on exploration of the experimental system and qualitatively describing the motion of the cart. Students are asked to indicate where the cart is moving relatively fast, relatively slowly, and where, if any place, the velocity is zero. The students evaluate the kinetic and potential energy at each point along the path of the object, look at how the force varies as a function of position, plot the potential-energy diagrams, and interpret the shape of the energy well to predict the motion of the cart under varying initial conditions. Then, they construct a variety of potential shapes using different configurations of magnets. With the Hall probe, they generate on-line graphs of the potential-energy diagrams. The potential diagram is then used as a representation of some unknown interaction. The students explore how an object will behave in this potential. On the basis of the given picture, they try to predict the motion under different initial conditions and proceed to empirically verify their hypothesis and expectations. The arrangement allows us to pose open-ended problems wherein the students are asked to configure the magnets so as to create a potential in which an object can be trapped in a certain region or have some other specified motion. Pondering over motion in potential-energy diagrams such as those in Fig. 9 provides a casual introduction to idealized models of particle interactions that the students will encounter in quantum physics.

Student response: In Fall 1995, 47 students completed the unit as an extra-credit activity. A questionnaire administered immediately afterwards, asked the students to describe their view of the effectiveness of these novel experiments. Table I lists the questions asked and the student response on a Likert scale of 1–5. Figure 10 summarizes these data graphically as a histogram for the two key questions, namely, the effectiveness of looking at potential energy versus distance graphs (Q3) and comparing the motion and the potential-energy dia-

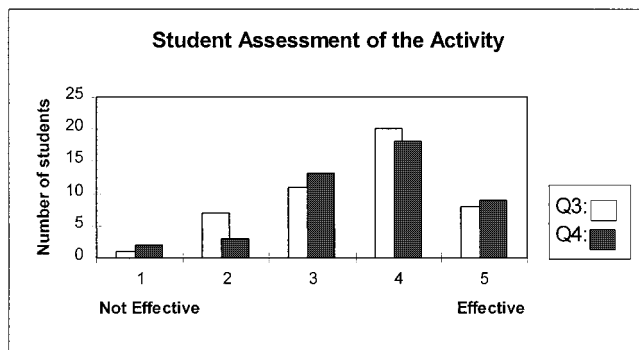


Fig. 10. Effectiveness of looking at the potential-energy versus distance graphs and comparing these with the motion of the cart.

grams (Q4). These data corroborate the observed enthusiasm of the students toward the hands-on activity and their perception of its usefulness.

IV. CONCLUSIONS

These experiments and the accompanying material have been field tested in the classroom over two successive semesters of instruction. The student response and feedback from classroom usage has been consistently positive. The real time capture of data and immediate processing makes it easy for the students to relate how different physical quantities change as a function of displacement. The sequence of experiments builds the bridge from tangible forces exerted by springy blocks to more complicated force fields exerted by a configuration of magnets. It systematically leads the students from a concrete experience of forces in real physical systems to the abstract representation of their effect in potential-energy diagrams. It allows them to move from specific experiments to general conclusions. We hope that this pedagogic route will prepare the students to extend the potential-energy diagram concept to models of interactions in quantum physics.

The experiments described in this paper can be used at various instructional levels either as laboratory activities

added to the traditional mechanics course or as a preamble to a quantum mechanics course. The emphasis can be either on the data capture and rigorous analysis to obtain potential-energy functions from the force of interaction, or it can be on generating on-line pictures of potential-energy diagrams and qualitative interpretation of motion of an interacting object.

A deliberate attempt has been made to use devices that are readily available from commercial suppliers. For a robust classroom arrangement, however, we found it convenient to fabricate additional accessory pieces. We have included a functional description of these in the paper.

ACKNOWLEDGMENTS

We are grateful to Richard Zotti for his help with the design and fabrication of the accessories used in this work and to Shauna Schauf-Allen for the schematic diagrams. One of us (PJ) would like to thank the American Physical Society and other sponsors for the grant of the Kilambi Ramavataram Fellowship which enabled her to work with the Physics Education Research Group at KSU during Fall 1995. She also thanks the Fulbright Foundation for the Tata-Fulbright Travel award. This work was supported, in part, by the National Science Foundation under Grant ESI-945-27882.

¹S. Leonard Dart, "Energy laboratory," *Am. J. Phys.* **53**, 320-322 (1985).

²J. Berger, "On potential energy, its force field and their measurement along an air track," *Eur. J. Phys.* **9**, 47-50 (1988).

³S. G. Eckstein, "The computerized student laboratory: Motion in a potential well," *Am. J. Phys.* **61**, 363-366 (1993).

⁴B. Saraf *et al.*, *Physics Through Experiment—Mechanical Systems* (Vikas, New Delhi, 1979).

⁵S. G. Eckstein, "Verification of fundamental principles of mechanics in the computerized student laboratory," *Am. J. Phys.* **58**, 909-915 (1990).

⁶Universal Lab Interface; Program MOTION, Version 4.5, Motion detector (U-MD); Student Force Sensor (Code SFS-DIN), Vernier Software.

⁷Dynamics System (ME-9249A), Air track (SF-9214), and assorted accessories, PASCO Scientific.

⁸Strain Gauge Force Sensor Kit (SGK-DIN), Vernier Software.

⁹Magnetic field sensor (Code MG-DIN), Vernier Software.

¹⁰Neodymium Magnets (EM-8621), PASCO scientific.

¹¹Dean Zollman, "Learning Cycles in a Large Enrollment Class," *Phys. Teach.* **28**, 20-25 (1990).

¹²Dean Zollman, "Preparing Future Science Teachers: The Physics Component of a New Programme," *Phys. Ed.* **29**, 271-275 (1994).

PURE COWARDICE

When Dirac published his relativistic equation for the electron in 1928, he opened the way for the discovery of quantum electrodynamics, which followed soon afterwards. The interpretation of the Dirac equation pointed to the necessity of the positron, but initially Dirac did not actually predict the existence of that particle. Instead, he indicated that somehow the expected positively charged object might be identified with the proton, which was well known experimentally but is almost two thousand times heavier than the electron (from which it differs in other important ways as well). When I asked him, many decades later, why he had not immediately predicted the positron, Dirac replied in his usual pithy manner, "Pure cowardice."

Murray Gell-Mann, *The Quark and the Jaguar: Adventures in the Simple and the Complex* (W. H. Freeman and Company, New York, 1994), p. 179.